

HL80M Dri-Prime® Hush-Pac

The Godwin Dri-Prime HL80M pump is an extremely powerful yet compact pump with flow capabilities to 104 m³/hr and discharge heads to 100 metres.

The HL80M features the unique Godwin high pressure oil bath mechanical seal design. This allows for dry running for prolonged periods while automatically priming and repriming. Able to perform in the toughest conditions, the HL80M can handle solids up to 25 mm in diameter. This makes it an extremely effective pump, suitable for both slurry and clean water applications. The powerful HL80M has proven itself a pump of choice for sewage handling, dewatering, local authority usage and many other applications.



Features and Benefits

- Fully automatic priming from dry to 8.5 metres suction lift.
- Godwin Dri-Prime is a continuously operated Venturi air ejector priming device which requires no periodic adjustment or control.
- Extensive application flexibility. It will handle sewage, slurries and liquids with solids up to 25 mm in diameter.
- Dry-running high pressure liquid bath mechanical seal, with high abrasion resistant Silicon carbide faces.
- A Close-coupled centrifugal pump with Godwin Dri-Prime system mounted to a diesel engine or electric drive.
- All cast iron construction (stainless steel construction option available) with cast steel impeller.
- Also available as a openset or as a bareshaft pumpend.
- Standard build engines; Perkins 1104D-44T, Perkins 404D-22T. Other engine options are available.

Specifications

Suction connection	100 mm (4" BS10 table 'D')
Delivery connection	80 mm (3" BS EN 1092 PN16)
Max capacity	104 m ³ /hr
Max Solids handling	25 mm
Max Impeller diameter	325 mm
Max operating temprature	80 °C *
Max pressure	9.8 bar
Max suction pressure	6.0 bar
Max casing pressure	14.7 bar
Max operating speed	2400 rpm


* Please contact our office for applications in excess of 80°C.

godwin 
a xylem brand

Reference number : 95-1108-1099
Date of issue : 21 October 2013
Issue : 9

Please contact the factory or office for further details.
A typical picture of the pump is shown.
All information is approximate and for general guidance only.

Performance Curve

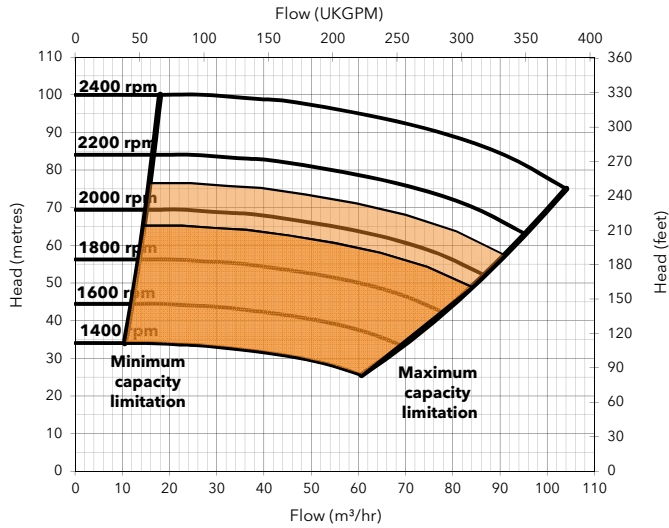

Engine option 1

Price list ref - HL80M-01-DBH-003

Perkins, 1104D-44T, 54.5 kW @ 2100 rpm

Impeller diameter 325 mm

Pump Speed 2100 rpm

Suction Lift Table

Total Suction Head (metres)	Total Delivery Head (metres)				
	40	52	59	66	69
	Output (m³/hr)				
3.0	98	87	76	60	49
4.6	95	85	70	46	-
6.1	87	78	65	49	-
7.6	63	60	54	33	-

Fuel capacity (Full) 340 litres, (Usable) 275 litres

Fuel consumption @ 1800 rpm 13.6 litres/hour

Weight: (Dry) 2,000 kg, (Wet) 2,300 kg

Dimensions: (L) 2,890 x (W) 1,300 x (H) 1,800 mm

Performance data provided in tables is based on water tests at sea level and 20°C ambient. All information is approximate and for general guidance only. Please contact the factory or office for further details.

Av Sound Pressure Rating (dba)			
Running Speed (rpm)	Distance		
	1m	3m	7m
1400	72	67	64
1800	75	70	65

Materials

Pump casing & suction cover	Cast iron BS EN 1561 - 1997
Wearplates	Cast Iron BS EN 1561 - 1997
Pump Shaft	Carbon steel BS EN 1561 - 1997
Impeller	Cast Steel BS3100 A5 Hardness to 200 HB Brinell
Non-return Valve body	Cast Iron BS EN 1561 - 1997
Mechanical Seal Faces	Silicon carbide vs silicon carbide

Engine option 2

Price list ref - HL80M-01-DBH-002

Perkins, 404D-22T, 28.8 kW @ 2000 rpm

Impeller diameter 315 mm

Pump Speed 2000 rpm

Suction Lift Table

Total Suction Head (metres)	Total Delivery Head (metres)				
	34	44	50	56	58
	Output (m³/hr)				
3.0	90	80	70	55	45
4.6	88	78	65	42	-
6.1	80	72	60	45	-
7.6	58	55	50	30	-

Fuel capacity (Full) 180 litres, (Usable) 162 litres

Fuel consumption @ 1800 rpm 7.2 litres/hour

Weight: (Dry) 1,300 kg, (Wet) 1,450 kg

Dimensions: (L) 2,190 x (W) 1,050 x (H) 1,500 mm

Performance data provided in tables is based on water tests at sea level and 20°C ambient. All information is approximate and for general guidance only. Please contact the factory or office for further details.

Av Sound Pressure Rating (dba)			
Running Speed (rpm)	Distance		
	1m	3m	7m
1400	72	67	64
1800	75	70	65



Xylem Dewatering Solutions UK Ltd
 Quenington, Cirencester
 Gloucestershire GL7 5BX, England
 Tel: +44 (0)1285 750271 Fax: +44 (0)1285 750351



Assessed to ISO 9001:2008
 Certificate N° 1027

Reference number : 95-1108-1099
 Date of issue : 21 October 2013
 Issue : 9

www.godwinpumps.com