

# 12V Submersible Purger Range

## TECHNICAL SPECIFICATIONS




	Mini-Purger	Super-Purger	Mega-Purger
Max. Pumping Depth	12m	18m	27m
Diameter	36mm	43mm	43mm
Length	128mm	260mm	392mm
Port Size	11/14mm	11/14mm	11/14mm
Max. Power Consumption	52.5W	96W	120W
Voltage Range	10V – 15V	10V – 15V	10V – 15V
Max. Current Draw	3.5 A	6.4 A	8.0 A
Cable Specification	Cable of 19m long fitted with crocodile clips	Cable of 19m long fitted with crocodile clips	Cable of 29m long fitted with crocodile clips

### Output Performance (gallons per min) at Head (ft)

Model	Current Draw	10	20	30	40	50	60	70	80	90
WP4012 - Mini-Purger	2.0-3.5 Amp	3.2	2.0	1.0	0.1	-	-	-	-	-
WP6012 - Super-Purger	3.3-6.4 Amp	3.0	2.3	1.6	1.1	0.5	0.1	-	-	-
WP9012 - Mega-Purger	5.1-8.0 Amp	3.5	3.1	2.6	2.2	1.7	1.4	0.9	0.6	0.2

### Purger Comparison with 12V at Cable

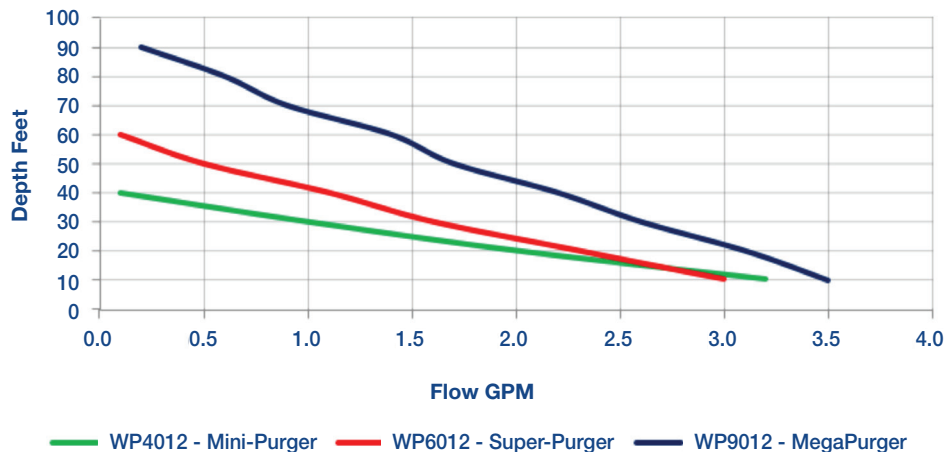

**For chemical compatibility, please speak contact the professionals from whom you purchased your equipment.**

Whale, 2 Enterprise Road, Bangor, Co. Down, BT19 7TA.

Tel: +44 (0)28 9127 0531 Web: [whalepumps.com](http://whalepumps.com) Email: [info@whalepumps.com](mailto:info@whalepumps.com)