


## 100M-25 x TR2

CURVE AP-3  
 ISSUE 3

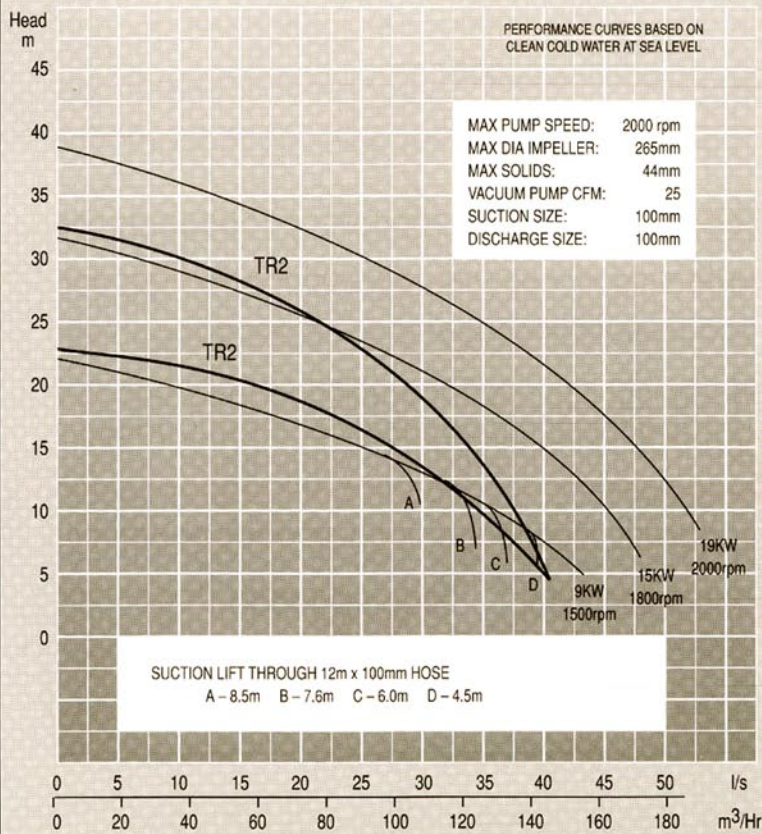

**Volute** Angle discharge, Horizontal suction.  
 Cast Iron.

**Impeller** 2 vane Open, Cast Iron.

**Wear Plate** SNG Cast Iron.

**Pump Shaft** Steel (BS970 EN8B).

**Bearings** DE: Twin Taper Roller  
 NDE: Cylindrical Roller.  
 L-10 Life: 40,000 hrs at 2000rpm (BEP).

**Shaft Seal** Semi-mechanical. Replaceable on site.

**NRV** Ball type polyurethane with reversible seat.

**Priming** Continuous with mechanical and pressure differential control.

**Air Handling** Oil lubricated rotary vacuum pump.

**Chassis** Box steel section combining a 69 litre fuel tank. 21 Hours running time.

**Wheels** Four solid rubber or two pneumatic or two road trailer.

**100M-25 x TR2** without Towbar (cm) 181 x 146 x 137. 650 kg.

**100M-25 Pump End** (cm) 102 x 70 x 104. 385 kg.