


SERIES 4030 | END SUCTION BASE MOUNTED SPLIT COUPLED | 6 × 4 × 10 | PERFORMANCE CURVE

File No: 40.4140
Date: MAY 10, 2016
Supersedes: NIL
Date: JUNE 1, 2000

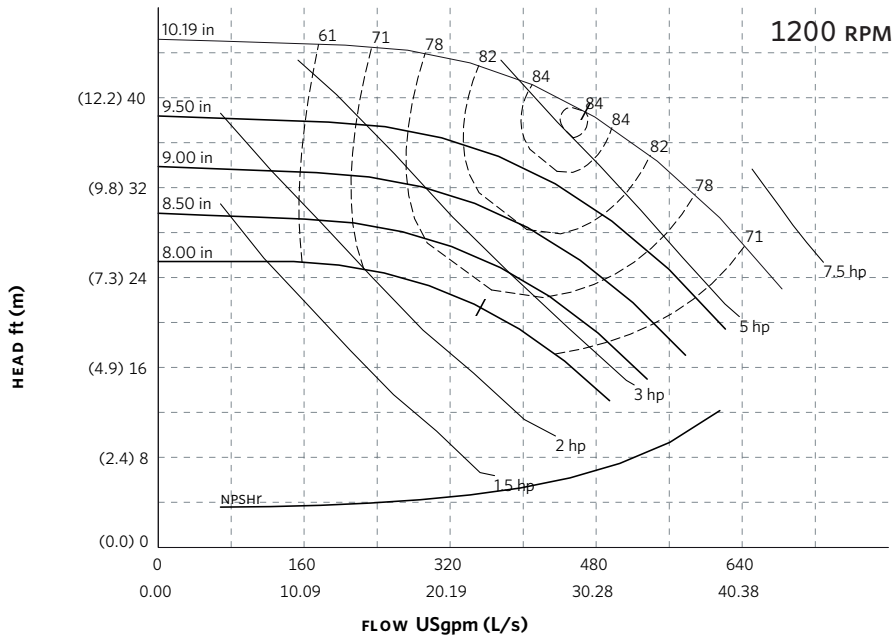

Curve number
PT96-1-0-1200

Series
4030
4280

Size
6 × 4 × 10


RPM
1200

BHP based on shown
Fluid's sp. gr.

Availability
4030 all ratings
4280 FR 143 MIN.

Performance
guaranteed only
at operating point
indicated.

Curve shown for
clear, cold water
- SP. GR. 1.0000

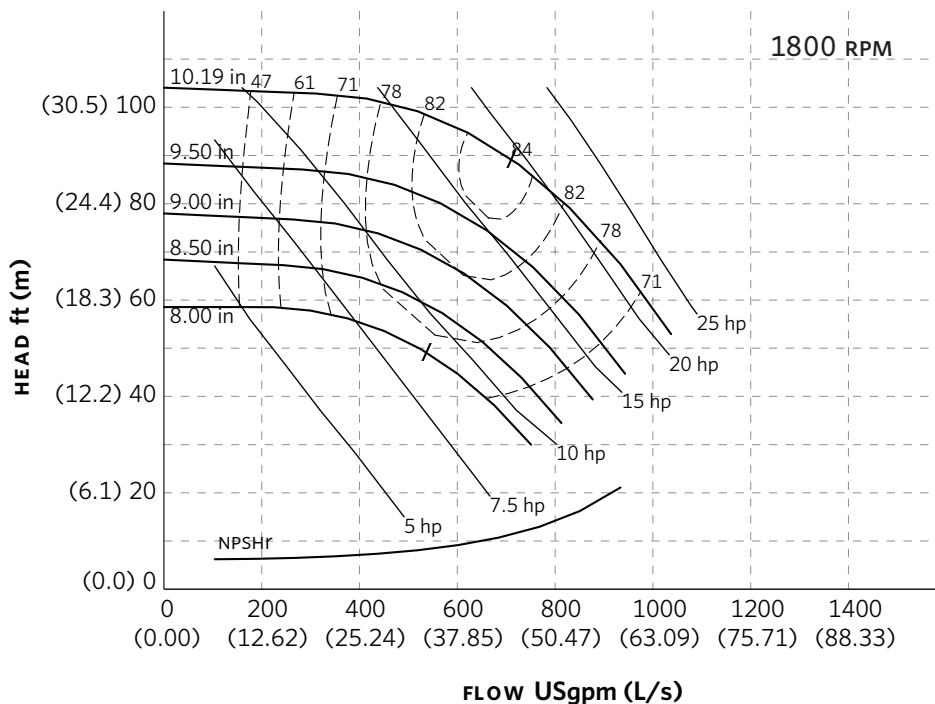

Curve number
PT96-1-0-1800

Series
4030
4280

Size
6 × 4 × 10

RPM
1800

BHP based on shown
Fluid's sp. gr.

Availability
4030 all ratings
4280 FR 143 MIN.


Performance
guaranteed only
at operating point
indicated.

Curve shown for
clear, cold water
- SP. GR. 1.0000

**PERFORMANCE
CURVE**

Series 4030
End suction base mounted split coupled

2

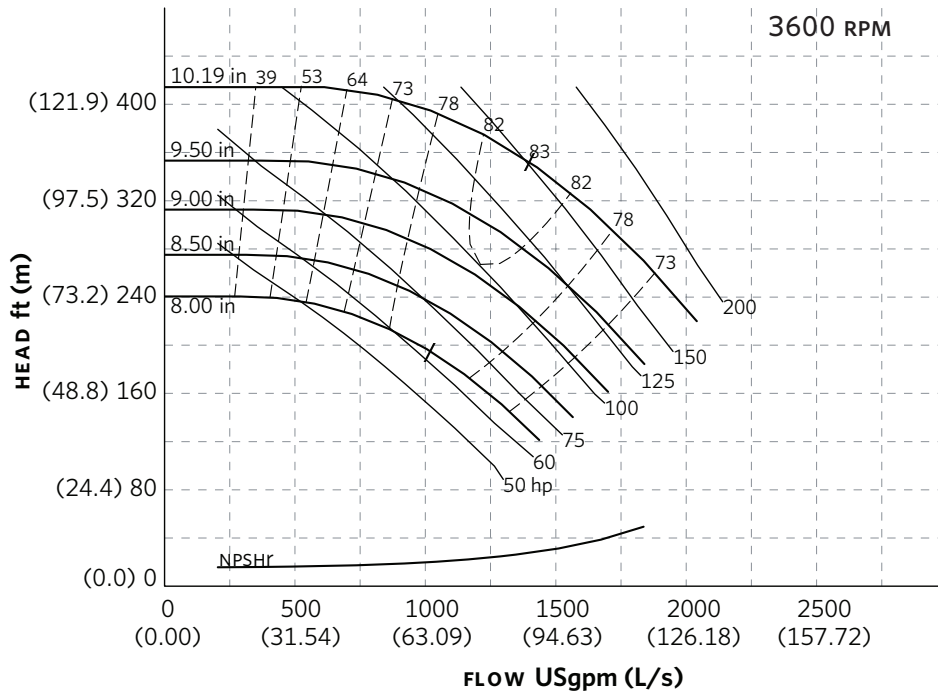

Curve number
PT97-1-0-3600

Series
4030
4280

Size
6 × 4 × 10

RPM
3600

BHP based on shown
Fluid's sp. gr.

Availability
4030 all ratings
4280 FR 143 MIN.

Performance
guaranteed only
at operating point
indicated.

Curve shown for
clear, cold water
- SP. GR. 1.0000

TORONTO
+1 416 755 2291

BUFFALO
+1 716 693 8813

BIRMINGHAM
+44 (0) 8444 145 145

MANCHESTER
+44 (0) 8444 145 145

BANGALORE
+91 (0) 80 4906 3555

SHANGHAI
+86 21 3756 6696

SÃO PAULO
+55 11 4781 5500

ARMSTRONG FLUID TECHNOLOGY
ESTABLISHED 1934

ARMSTRONGFLUIDTECHNOLOGY.COM