

WARMAN INTERNATIONAL LIMITED

TYPICAL PUMP
PERFORMANCE CURVES

WARMAN PUMP				IMPELLER: FH4147				
SIZE	FRAME		TYPE	VANES	TYPE	IMPELLER MAT'L	VANE #	LINER MAT'L
	F	FF(X)						
6/4	S(X)		HH	GLAND SEALED PUMP				
Frame				NORMAL MAX. SPEED				
Rating [kW]				1000 r/min				
	F	FF(X)	S(X)					
	260	425	580					


WPA
64E01M

ISSUED

MIN. PASSAGE SIZE
57
mm SPHERE

CURVE SHOWS APPROXIMATE PERFORMANCE FOR CLEAR WATER. (To International Test Standard ISO2848 Class C) ; For media other than water, corrections must be made for density, viscosity and/or other effects of solids. WARMAN INTERNATIONAL LTD. reserve the right to change pump performance and/or design impellers without notice. Frame suitability must be checked for each duty and drive arrangement. Not all frame alternatives are necessarily available from each manufacturing centre.

© 1998-2001
WARMAN INTERNATIONAL LTD.

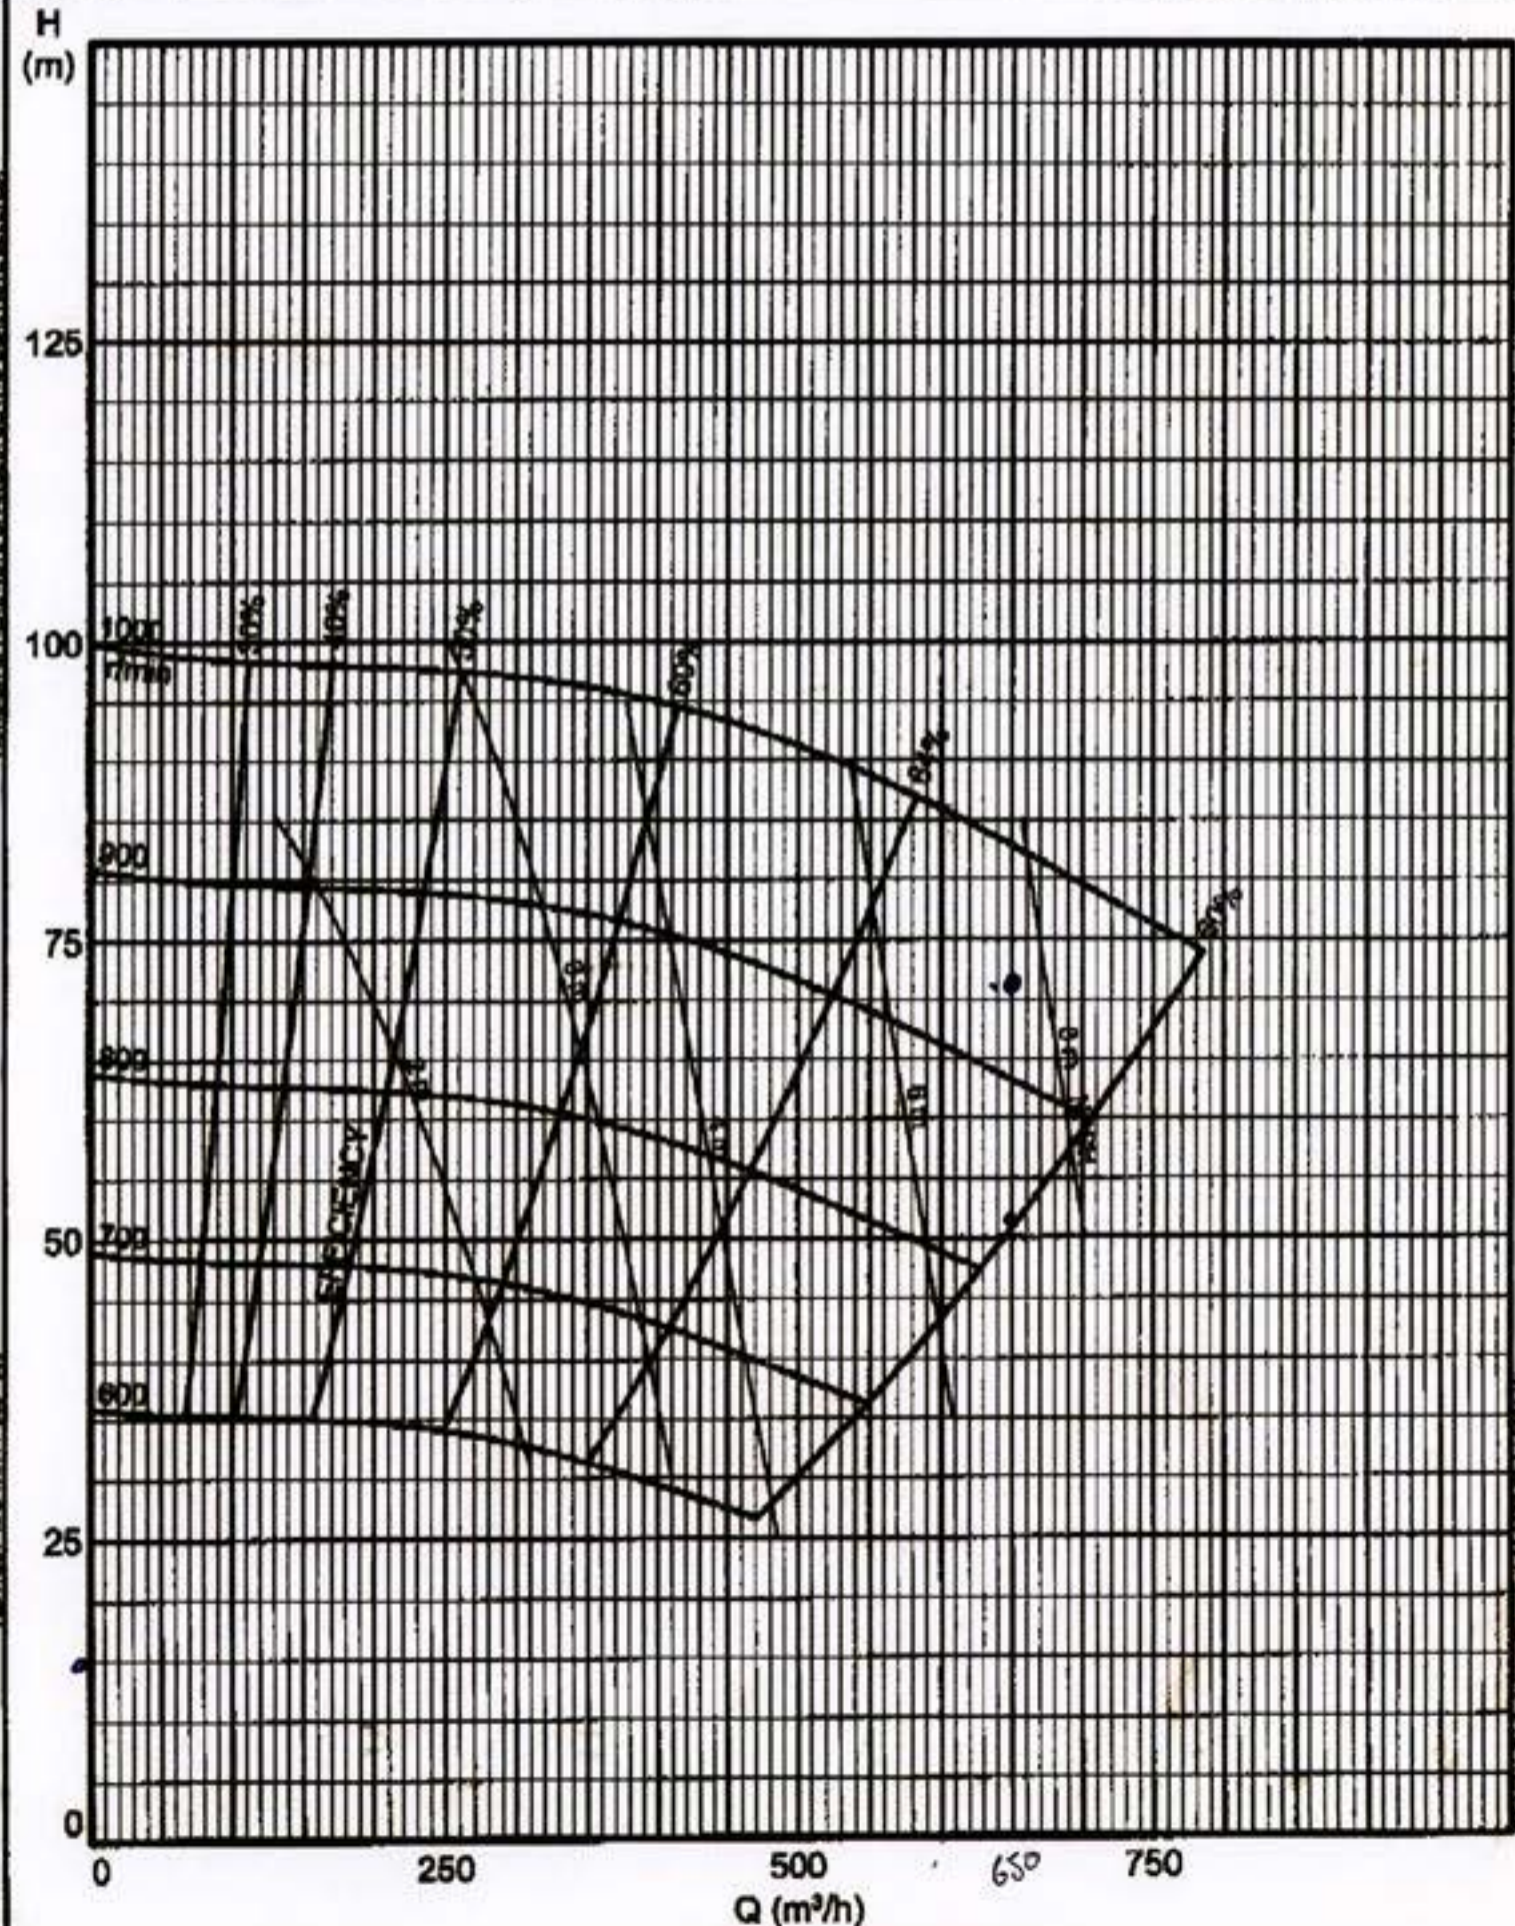

LAST ISSUE MARCH 1984

B5Y064V3

PREF. TEST. 28 & 17-AD-R-528 - 5/2

Prepared by Performance Curves of 01 1000E (01/1998) (1/1)