


Horizontal Pump 200 PC

Slurry
Equipment
Solutions



CURVE SHOWS APPROXIMATE PERFORMANCE FOR CLEAR WATER (International Test Standard ISO9906:1999 - Grade 2 unless otherwise specified). For media other than water, corrections must be made for density, viscosity and/or other effects of solids. WEIR MINERALS reserves the right to change pump performance and/or delete impellers without notice. Frame suitability must be checked for each duty and drive arrangement. Not all frame alternatives are necessarily available from each manufacturing centre.

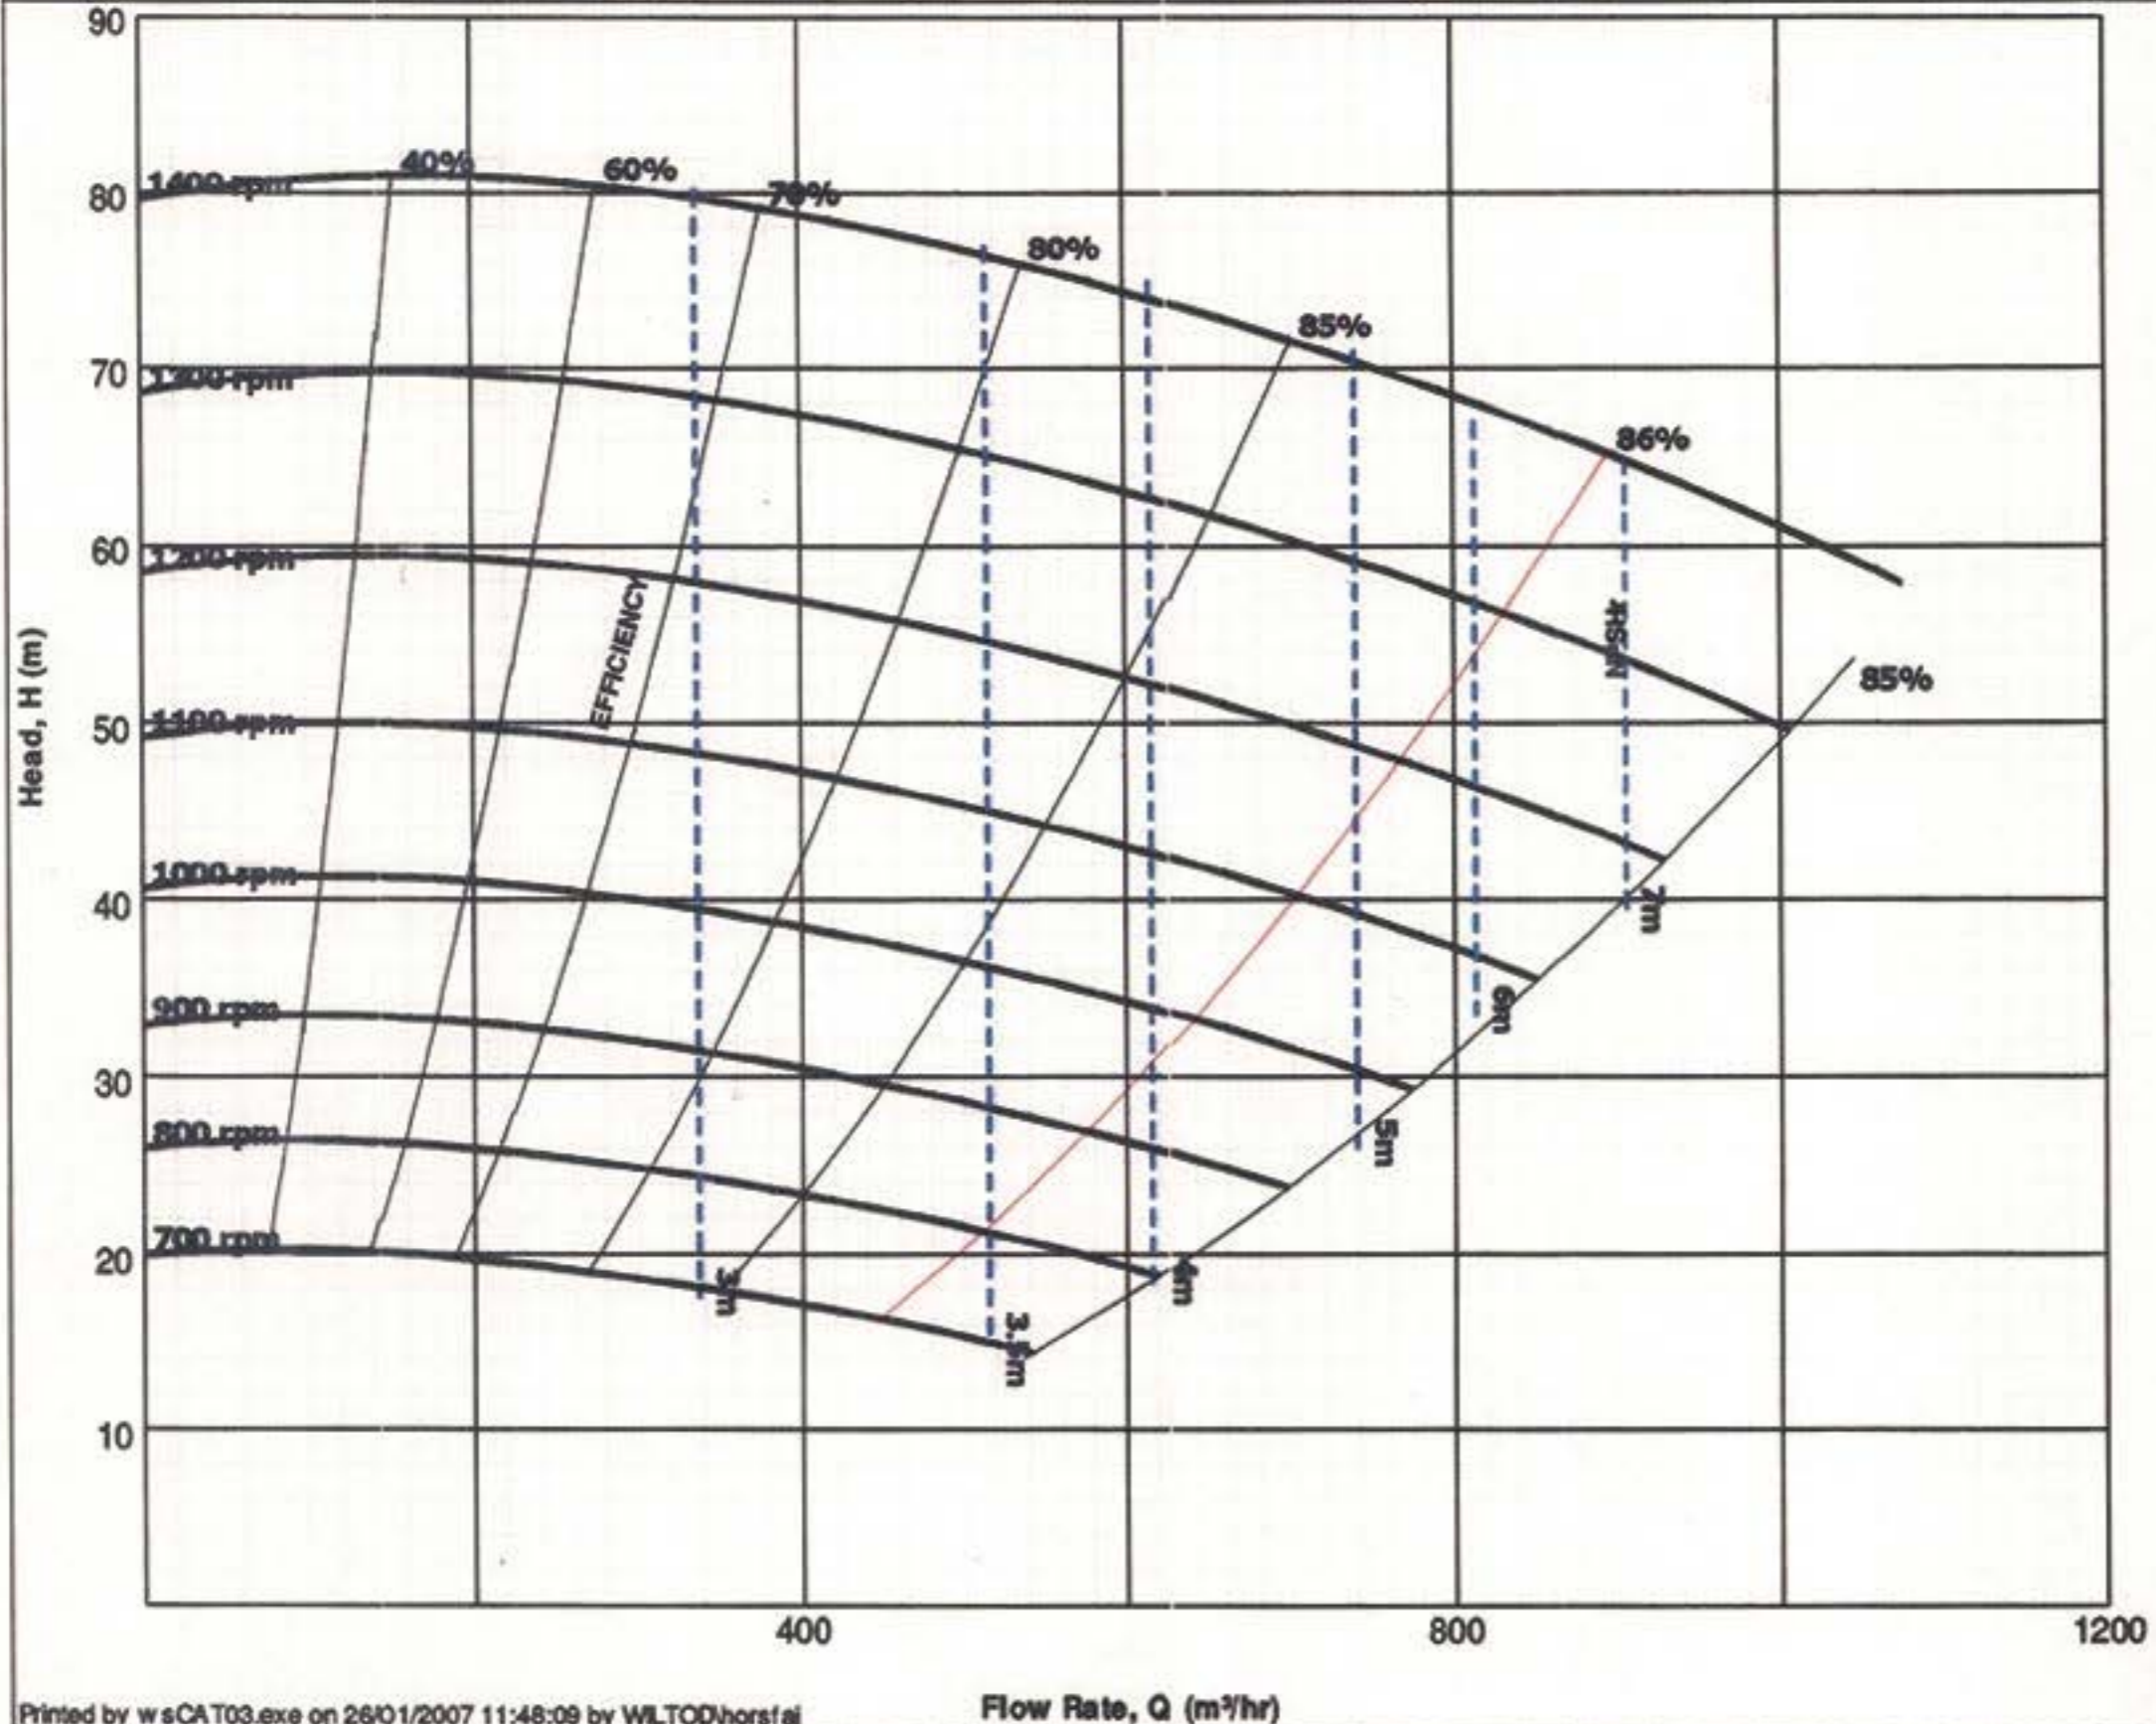

Pump	
Suction	190mm
Discharge	200mm
Impeller	
Vanes	4
Vane ϕ	500mm
Type	Closed
Part No	Material
PF20145	Metal
Frame (Rating - KW)	
PF	300
Seal	
Gland Sealed Pump	
Liner (Norm Max r/min)	
Unlined	1400
Min Passage Size	
50mm	
Curve	
Revision	1
Revision Notes	TESTED PERFORMANCE
Reference	TEST No.31, 31A; A4-P-2296
Issued	Oct 92

© 1/2007 Weir Minerals Australia
All Rights Reserved

TYPICAL PUMP PERFORMANCE CURVE
WPA200A103/1