

C3356 Motor rating and performance, 50 Hz

Low voltage

Table 52: C3356, 50 Hz, low voltage

Curve / impeller no.	Rotations per minute	Drive unit	Voltage, V	Rated power, kW	Rated current, A	Starting current, A	Power factor cos φ
610	985	605 / 615	400	58	118	660	0.78
		665 / 675	400	75	150	835	0.79
		665 / 675	400	90	185	1160	0.76
		705 / 715	400	100	202	1150	0.78
		735 / 745	400	140	268	1545	0.81
		765 / 775	400	209	345	2230	0.80
810	730	605 / 615	400	45	95	425	0.77
		665 / 675	400	55	115	525	0.77

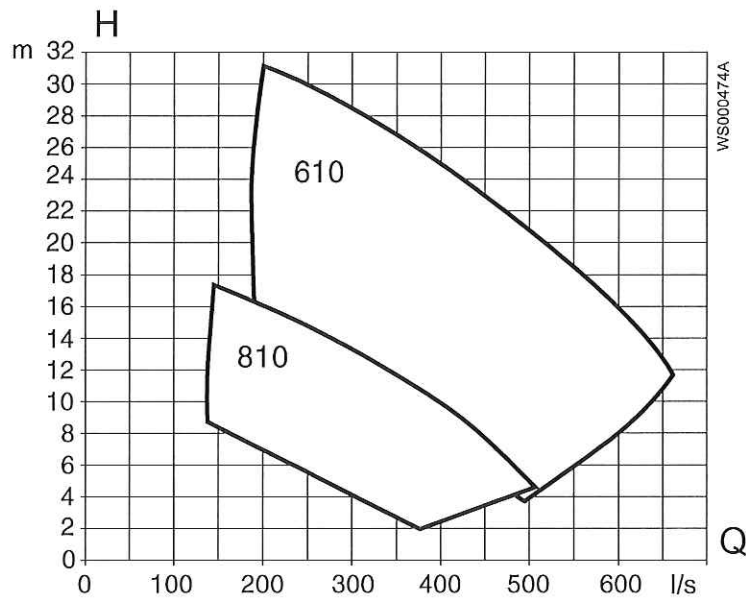


Figure 59: C3356, 50 Hz, low voltage